



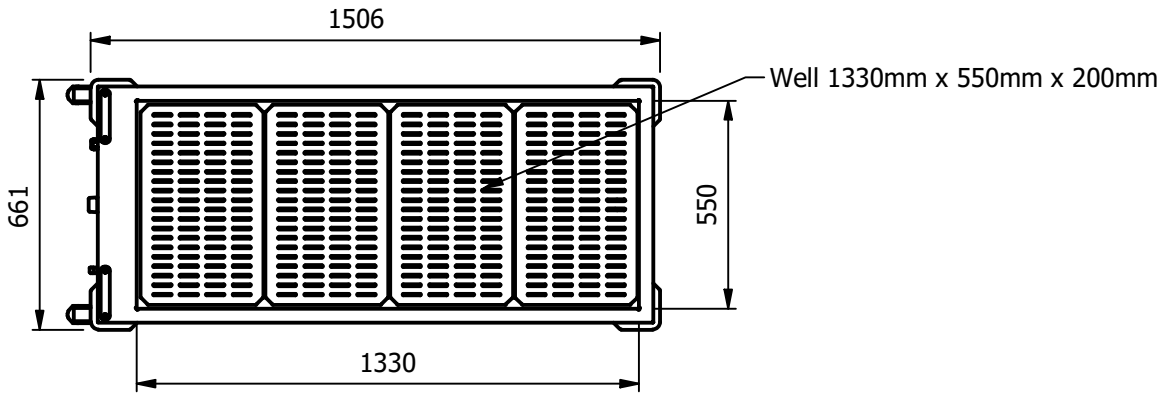

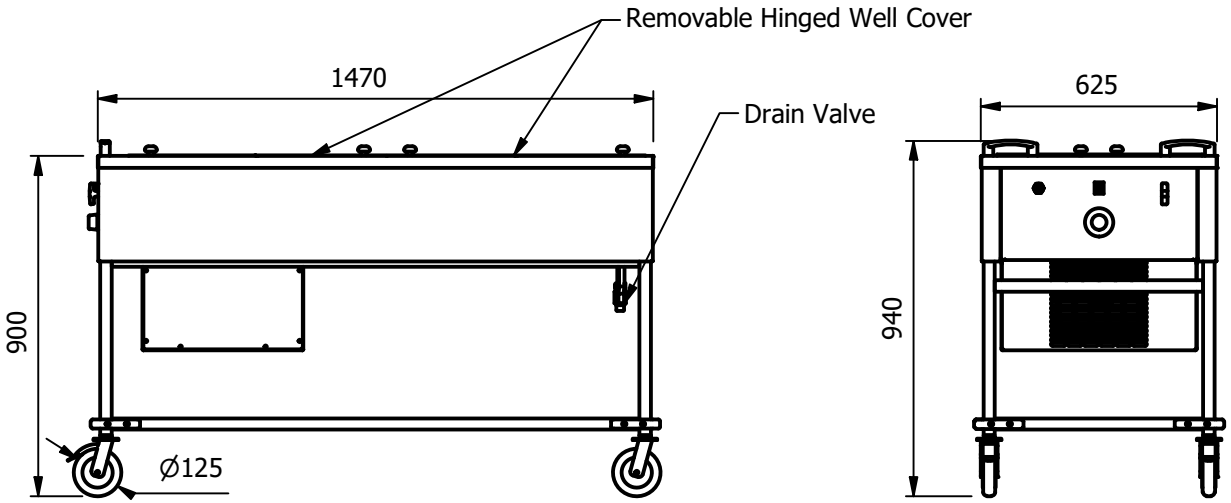

Versigen Specification

Cold contact chilled well
complete with a drain valve,
removable perforated base trays
and a removable hinged well cover

Dimensions
Width - 1506mm
Depth - 661mm
Height - 940mm (Worktop 900mm)
Weight - 84kg

Capacity of Well
1330mm x 550mm x 200mm deep
Can accommodate Four GN1/1 pans up to 150mm deep

Power Rating
0.75kw / 10amp

Materials
1.2mm 304 Grade St/ Steel Top & Supports
0.7mm 430 Grade St/ Steel Outer Structure

Installation
All swivel castors, two braked

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	TROLLEYS			Product No		No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as ammended by the Design Copyright Act 1968.	Versigen	
Description	VMCW4							
Material/Finish		Thickness		Desp/Date				
Legacy P/N		Weight	84kg	Quote No.		Dwg No.	VCP-077963	Issue
Client				SO Number	STD	Drawn By	ABB	-
Client Project				Approved By		Date	04/08/2020	
Versigen Australia Pty Ltd 1/182 Hartley Road, Smeaton Grange NSW 2567 T: +61 1300 653 330, E: sales@versigen.com.au, Web: www.versigen.com.au						Scale	1 : 20	Sheet 1 / 2 **A4**