



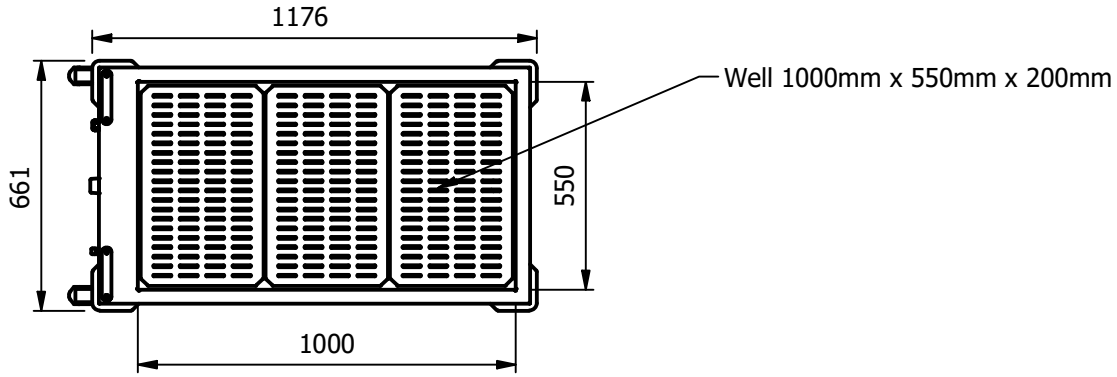

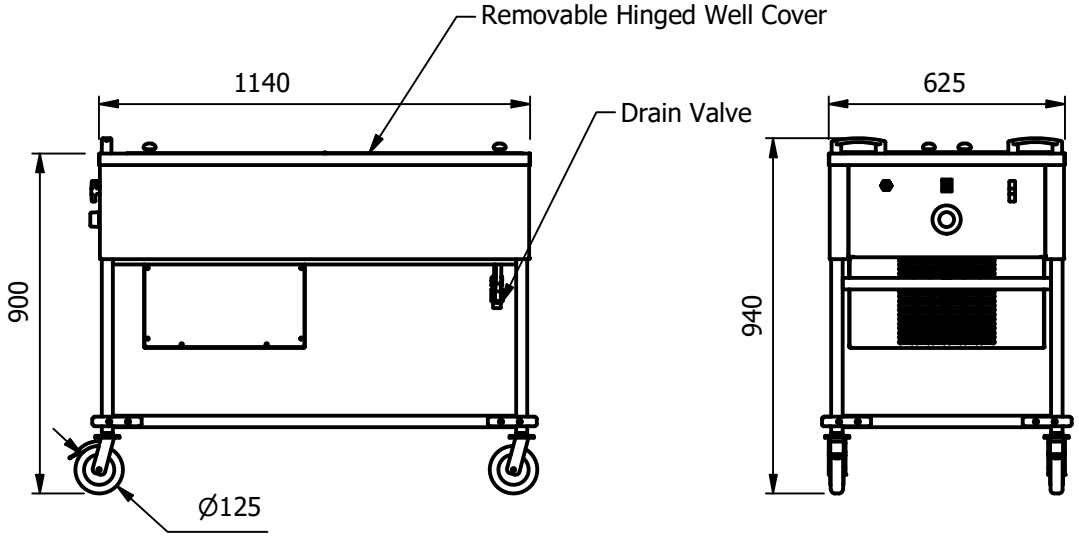

Versigen Specification

Cold contact chilled well
complete with a drain valve,
removable perforated base trays
and a removable hinged well cover

Dimensions
Width - 1176mm
Depth - 661mm
Height - 940mm (Worktop 900mm)
Weight - 74kg

Capacity of Well
1000mm x 550mm x 200mm deep
Can accommodate Three GN1/1 pans up to 150mm deep

Power Rating
0.75kw / 10amp

Materials
1.2mm 304 Grade St/ Steel Top & Supports
0.7mm 430 Grade St/ Steel Outer Structure

Installation
All swivel castors, two braked

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	TROLLEYS			Product No		© No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as ammended by the Design Copyright Act 1968.	Versigen	
Description	VMCW3							
Material/Finish		Thickness		Desp/Date				
Legacy P/N		Weight	74kg	Quote No.		Dwg No.	VCP-077960	Issue
Client				SO Number	STD	Drawn By	ABB	-
Client Project				Approved By		Date	04/08/2020	
Versigen Australia Pty Ltd 1/182 Hartley Road, Smeaton Grange NSW 2567 T: +61 1300 653 330, E: sales@versigen.com.au, Web: www.versigen.com.au						Scale	1 : 20	Sheet 1 / 2 **A4**