

Overview

Heated Grab & Go display units with ambient storage cupboard under. These heated display units have LED illumination for increased food presentation. The three heated upper shelves are perfect for attractively displaying hot foods such as soup, pies, pasties, and pastries. With a neutral bottom deck area which is great for displaying sweet pastry's like croissants and pain au chocolate. With accurate digital control, these hot display units are designed to maintain pre-heated, cooked food at a regulated temperature. In an ambient room temperature above 16C.

Designed to match Versigen refrigerated display units complete with rear sliding doors for easy back of counter food loading. The unique Versigen anodised alloy heat radiating shelf system provides a constant heat source for holding pre-heated food at a safe, regulated temperature while retaining taste and freshness.

Fantastic for an impulse buy display at payment points.



Key Features:

- High visibility glass display with LED illumination.
- Mobile all swivel castors two with brakes.
- Superstructure complete externally and internally in bright polished stainless steel.
- Smooth sliding doors allow for easy loading.
- Neutral storage cupboard.
- Point of sale / display ticket strips.
- 3 heated shelves and a Non heated bottom deck.
- Digital thermostatic temperature control housed conveniently within the cabinet hood for easy access.
- 24 hour operation.
- Supplied with 2m long power cord and 10amp plug [10A 230v 50Hz].

Options:

- Curved or square glass style open or full front.
- Wide choice of coloured outer panels (Durable plastic coated steel).
- Fold down solid tray slide or tubular tray rail.

Note:

Low height models are available set at 800mm high.

Ideal for children up to 12 years.

These low height models have a "B" added to the model code.




Optional solid tray slide

Model	Matching Unit size
VC2TS	2
VC3TS	3

Optional tubular tray rail

Model	Matching Unit size
VC2TR	2
VC3TR	3

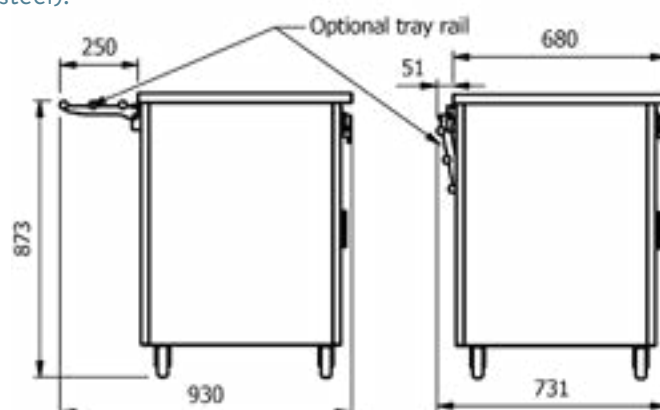

This unit features Versigen's unique radiated heated anodised alloy Shelving.



VC3HD



VC2HDF

Curved glass type, open front display with LED illumination, rear sliding doors, and ambient storage cupboard underneath.

Model open front	Weight (kg)	L x W x H (mm)	Electrical Supply	Power Rating (kw)
VC2HD	90	830 x 680 x 1650	10amp	1.05
VC3HD	125	1158 x 680 x 1650		1.50

Curved glass type, closed front display with LED illumination, rear sliding doors, and ambient storage cupboard underneath.

Model closed front	Weight (kg)	L x W x H (mm)	Electrical Supply	Power Rating (kw)
VC2HDF	90	830 x 680 x 1650		1.05
VC3HDF	125	1158 x 680 x 1650		1.50



VC3HDSL



VC3HDSLF

Square glass type, open front display with LED illumination, rear sliding doors, and ambient storage cupboard underneath.

Model open front	Weight (kg)	L x W x H (mm)	Electrical Supply	Power Rating (kw)
VC2HDSL	90	830 x 680 x 1655		1.05
VC3HDSL	125	1158 x 680 x 1655		1.50

Square glass type, closed front display with LED illumination, rear sliding doors, and ambient storage cupboard underneath.

Model closed front	Weight (kg)	L x W x H (mm)	Electrical Supply	Power Rating (kw)
VC2HDSLF	90	830 x 680 x 1655		1.05
VC3HDSLF	125	1158 x 680 x 1655		1.50



Curved glass option



Square glass option